

Low Speed - Low Flows "QG"

For General Lab and Industrial Use



- A choice of five different drive speeds.
- Ceramic and fluorocarbon standard wetted materials.
- Long-life, fan cooled, thermally protected, ball bearing gear motors.
- Convenient multi-position tilt stand for wall or counter mounting.

QG PDM (PUMP DRIVE MODULE)

MAX. Flow/Pressure				PDM	Piston Code	Drive Price
ML/MIN	GAL/HR	PSIG	BAR			
1.25	.019	100	6.90	QG50	RH00	
2.50	.039				RH0	
4.00	.063				Q0	
5.00	.079				RH1	
16.00	.252				Q1	
36.00	.568	25	1.72	QG150	Q2	
64.00	.998				Q3	
3.75	.059				RH00	
7.50	.118				RH0	
12.00	.189				Q0	
15.00	.237	100	6.90	QG400	RH1	
48.00	.758				Q1	
108.00	1.706				Q2	
192.00	2.995				Q3	
10.00	.158				RH00	
20.00	.316	RH0				
32.00	.505	Q0				
40.00	.632	100	6.90	QG400	RH1	
128.00	2.022				Q1	
288.00*	4.550				Q2	
512.00*	7.987				Q3	



Drive Options

230 VAC (50/60 Hz)*

Part Number: -2

Price:

24 VAC (50/60 Hz)*

Part Number: -3

Price:

Mounting Base (pg.14)


Part Number: -MB

Price:

Dial Indicator (pg.22)

Part Number: -Q485

Price:

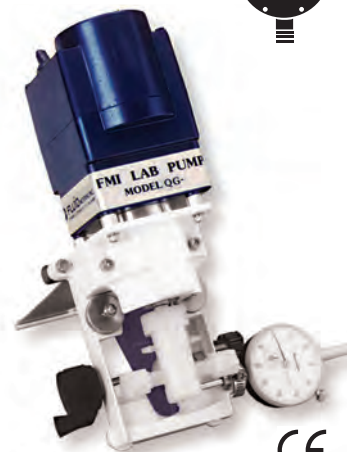

QG50,150,400

Dimensions:

10 3/4" x 4 7/8" x 5 3/4" wide
(273 x 124 x 146 mm)

Shipping weight:

10 lb (4.5 kg)

Electrical:

115 VAC, 60 Hz, 1Ø, 1 amp,
50, 150, 400 RPM, shaded 2
pole, enclosed ventilated,
thermally protected, with 3
prong power cord - UL, CE.

*See Page 27 for General Specification notes

PHM (PUMP HEAD MODULE)

Piston Size Code	Materials of Construction								
	CKC	CKY	CSC	CSY	SAN	SKY	SSY	STY	CTC
RH00									
RH0									
RH1									
Q0									
Q1									
Q2									
Q3									
Wetted Parts	Ceramic PVDF	Ceramic PVDF Carbon	Ceramic 316 SS	Ceramic 316 SS Carbon	Ceramic Teflon	316 SS PVDF Carbon	316 SS Carbon	316 SS Tefzel Carbon	Ceramic Tefzel
MAX.Temp	212° F	212° F	350° F	350° F	350° F	140° F	140° F	140° F	212° F
Options	(add Option Code & cost to Pump Module for complete price and part number)								
LF (pg.20)	N/C	N/C				N/C		N/C	N/C
W (pg.20)									
WT (pg.20)									
TC (pg.30)									
R479 (Pg.22)									
S ("Q" Only)									

*See page 28 "Pump Head Materials Configuration" for additional information.



PD-60-LF

Pulse Damper Accessory
(see pg 22) for more info.

LIVE ONLINE HELP

>> Chat live online with an application expert.



FMI FLUID METERING, INC.

Have questions?
Chat live with an FMI
application specialist at
www.fmipump.com

